


C-2200-CE2 (Conversor Eletroeletrônico) C-2200-CE2 (Electro-Electronic Converter)

C-2200-CE2-CX (Conversor Com Caixa IP65) / C-2200-CE2-CX (Converter with Box IP65)

C-2200-CE2-PL (Conversor Sem Caixa) / C-2200-CE2-PL (Converter without Box)

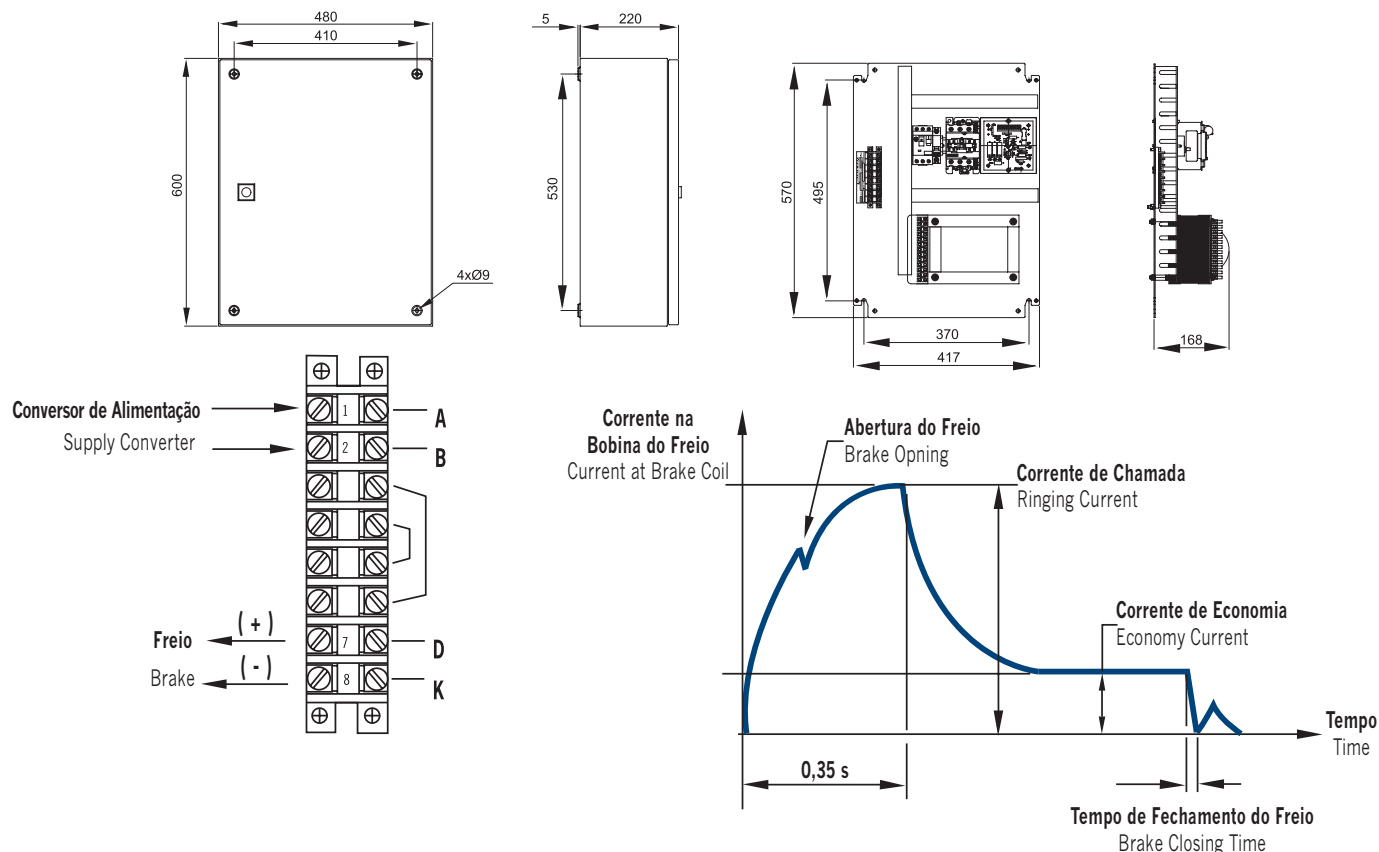

Características do Conversor C-2200-CE2 / Features of Converter C-2200-CE2

Fonte de Alimentação / Power Supply:	220 / 380 / 440 / 480 [Vca] ±15%	Potência do Transformador / Transformer Power:	2045VA
Tensão de Saída (FED1) / Output voltage (FED1):	50 / 10 Vcc	Peso (com e sem caixa) / Weight (w/ and w/o box):	44 kg / 27 kg
Número de Manobras / Number of maneuvers:	700 man. / h	Frequência / Frequency	50 / 60 Hz
Temperatura Ambiente / Room Temperature:	-20....60°C	Grau de Proteção com Caixa / Protection level with box:	IP65

Tipo Type	Freios / Brakes		Resistência / Resistance	Corrente por Freio / Current per Brake		Disjuntor / Circuit Breaker	Disjuntor de entrada recomendado (A) (curva C) / Recommended Input Circuit breaker (A) (curve C)			
	Modelos / Model	Qtd. / Qty	(Ω)	Chamada (A) Call (A)	Economia (A) / Economy (A)	Saída (A) / Output (A)	480Vca	440Vca	380Vca	220Vca
T2	54C / 54 CR	2	1,7	29,4	5,9	16,0	6,0	6,0	6,0	16,0
	4C	2	1,8	27,8	5,6	16,0	6,0	6,0	6,0	10,0
	5CR / 5CL / 5I / 5IR	2	2,4	20,8	4,2	10,0	4,0	4,0	4,0	10,0
T1	3C / 1C / 30C / OSA	1	0,72	69,4	13,9	32,0	16,0	16,0	16,0	32,0
	2C	1	0,8	62,5	12,5	25,0	10,0	16,0	16,0	32,0
	3.1C	1	0,8	62,5	12,5	25,0	10,0	16,0	16,0	32,0

*Característica especial do conversor modelo 2200: tensão de chamada superior devido ao tempo de chamada reduzido em relação a outros modelos

*The converter model 2200 has a special feature: its call voltage is higher due to its call time being shorter in relation to other models.

A VULKAN se reserva o direito de alterar formas, valores e dimensões construtivas sem prévio aviso.
 VULKAN reserves the right to change shapes, values and construction dimensions without prior notice.