
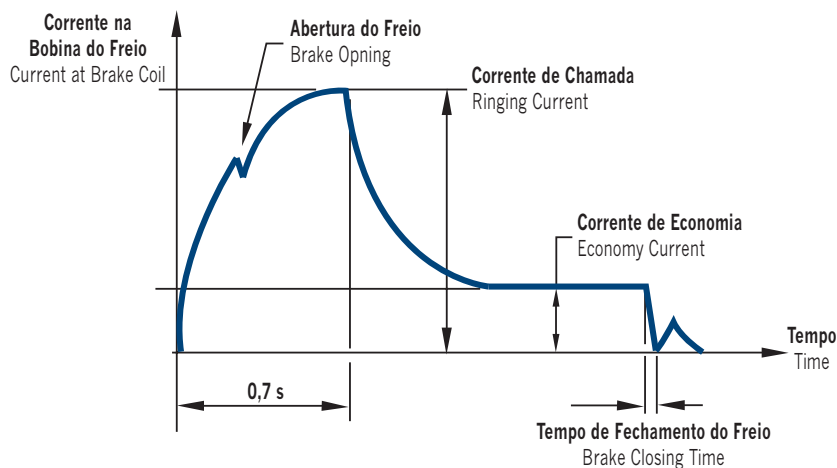
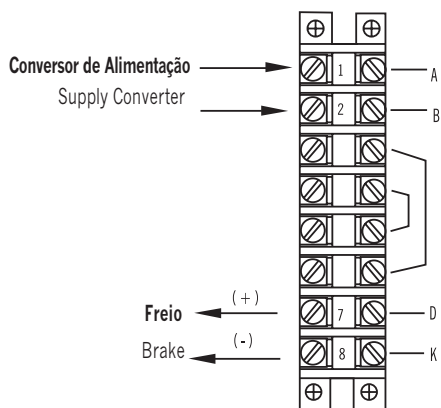


C-4400-CE2 (Conversor Eletroeletrônico) C-4400-CE2 (Electro-Electronic Converter)

C-4400-CE2-CX (Conversor Com Caixa IP65) / C-4400-CE2-CX (Converter with Box IP65)

C-4400-CE2-PL (Conversor Sem Caixa) / C-4400-CE2-PL (Converter without Box)

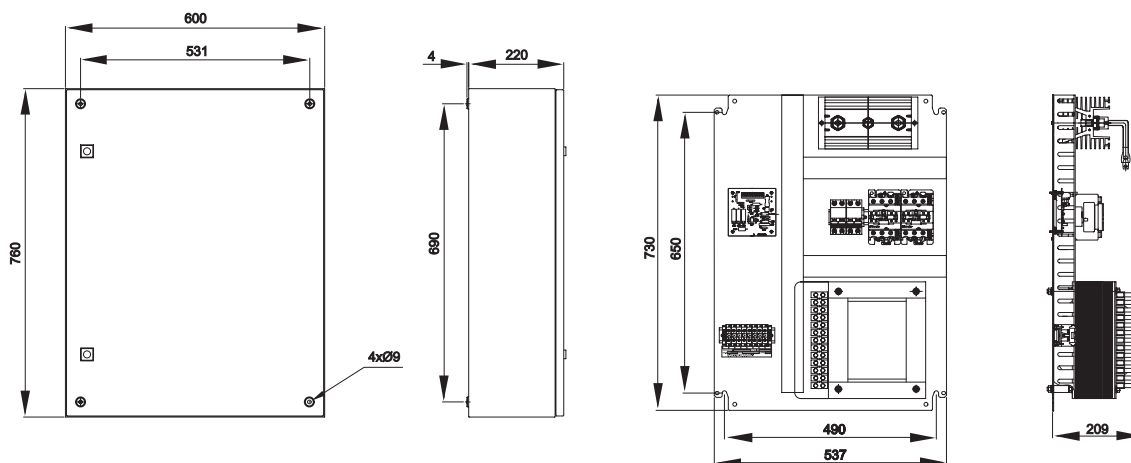

Características do Conversor C-4400-CE2 / Features of Converter C-4400-CE2

Fonte de Alimentação / Power Supply:	220 / 380 / 440 / 480 [Vca] ±15%	Potência do Transformador / Transformer Power:	6000VA
Tensão de Saída (FED1) / Output voltage (FED1):	50 / 10 Vcc	Peso (com e sem caixa) / Weight (w/ and w/o box):	80 kg / 64 kg
Número de Manobras / Number of maneuvers:	700 man. / h	Frequência / Frequency	50 / 60 Hz
Temperatura Ambiente / Room Temperature:	-20....60°C	Grau de Proteção com Caixa / Protection level with box:	IP65

Tipo Type	Freios / Brakes		Resistência / Resistance	Corrente por Freio / Current per Brake		Disjuntor / Circuit Breaker	Disjuntor de entrada recomendado (A) (curva C) / Recommended Input Circuit breaker (A) (curve C)			
	Modelos / Model	Qtd. / Qty	(Ω)	Chamada (A) / Call (A)	Economia (A) / Economy (A)	Saída (A) / Output (A)	480Vca	440Vca	380Vca	220Vca
T1	3C/1C/30C/OSA	2	0,72	69,4	13,9	32,0	16,0	16,0	20,0	32,0
	2C	2	0,8	62,5	12,5	25,0	10,0	16,0	20,0	32,0
	3.1C	2	0,8	62,5	12,5	25,0	10,0	16,0	20,0	32,0